




Trico API Sump Bottle

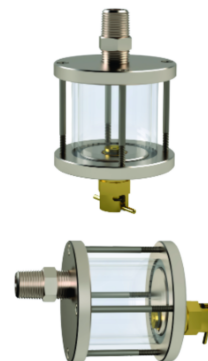

PRODUCT DESCRIPTION

Trico API Sump Bottles are designed for oil level monitoring and sampling on equipment sumps. Available in 2 oz and 5 oz capacities with centered or offset valve styles. Borosilicate Pyrex reservoir provides clear visibility of oil level and condition.

KEY FEATURES & BENEFITS

- Available in 2 oz and 5 oz capacities
- Centered and offset valve styles available
- Borosilicate Pyrex reservoir for clear oil level visibility
- 1/2" NPT connection
- Stainless steel and brass construction

TECHNICAL SPECIFICATIONS

Parameter	Value	Unit	Test Method
Operating Temperature	-40°F (-40°C) to 225°F (107°C)		
Reservoir	Borosilicate - Pyrex		
Gasket	Buna-N		
Materials	Stainless Steel and Brass		
31401 — API Sump Bottle, Centered Valve	1/2 NPT 2 oz H: 5.33" D: 3.00"		
31403 — API Sump Bottle, Offset Valve	1/2 NPT 2 oz H: 5.33" D: 3.00"		
31406 — API Sump Bottle, Centered Valve	1/2 NPT 5 oz H: 5.82" D: 3.50"		
31408 — API Sump Bottle, Offset Valve	1/2 NPT 5 oz H: 5.82" D: 3.50"		

The information contained in this data sheet is based on data considered to be accurate. No warranty is expressed or implied regarding the accuracy of this data. Product specifications and availability are subject to change without notice. Lube Control Pty Ltd accepts no responsibility for any loss or damage arising from the use of this information.